

Start eco Batten IP65

START eco Batten 1200 IP65 5200lm 840

0045153



Product features

- The new upgraded Start eco Batten IP65 (upgraded version of Batten LED LINK) is a versatile range of slimline LED waterproof luminaires that provide an ideal solution for interior and exterior applications such as workshops, garages and outdoor covered spaces. The design allows the luminaire to be easily linked to another luminaire through an IP65 rated connector. The product can be a slimline replacement for single and twin 36W/58W fluorescent waterproof battens. Polycarbonate housing and diffuser, 5200 lm, 42 W, 124 lm/W, 4000 K, drive current 270 mA, non dimmable, CRI 80, IP65, IK08, Class II, nominal average lifetime (h): 30000, 1200 mm x 80 mm x 53.6 mm, energy class: A++ A+ A.



NOTES

undefined

PRODUCT OVERVIEW

Product name	START eco Batten 1200 IP65 5200lm 840
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Residential & Consumer
ETIM Class	EC000109
E-number FI	4274232
E-number SE	7214470
Fixture luminous flux (lm)	5200
Luminaire efficacy (lm/W)	124
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	42
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP65
IK rating	IK08
Product EAN number	5410288451534

Start eco Batten IP65

START eco Batten 1200 IP65 5200lm 840

0045153

DATA TABLE

General data

Product name	START eco Batten 1200 IP65 5200lm 840
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Residential & Consumer
Operating temperature range (°C)	-10°C - 40°C
Performance ambient temperature T _q (°C)	25
ETIM Class	EC000109
E-number FI	4274232
E-number SE	7214470

Optical data

Fixture luminous flux (lm)	5200
Luminaire efficacy (lm/W)	124
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Distribution type	Direct
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	42
Mains voltage (V)	220-240V~
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Drive current (mA)	270
Inrush Current (A)	16
Inrush Duration (µs)	250
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	33
Max. Luminaires per 13A C Breaker	43
Max. Luminaires per 16A C Breaker	54
Max. Luminaires per 20A C Breaker	67

Start eco Batten IP65

START eco Batten 1200 IP65 5200lm 840

0045153

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP65
IK rating	IK08
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	80
Nominal Product Height (mm)	53.6
Weight (kg)	1.114

Packaging

Single packaging type	Carton
Product EAN number	5410288451534
Packaging single length / height (cm)	129.77
Packaging single width (cm)	9.93
Packaging single depth (cm)	6.57
DUN14 (outer)	15410288451531
Units per outer package	12
Packaging outer length / height (cm)	131.0
Packaging outer width (cm)	32.2
Packaging outer depth (cm)	28.6

Safety data


Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	2.19 1.47	5472	196	492
1.0	4.39 2.93	1368	49	123
1.5	6.58 4.40	608	22	55
2.0	8.78 5.86	342	12	31
2.5	10.97 7.33	219	8	20
3.0	13.17 8.80	152	5	14

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 111.4°)
— C90 - C270 (Half beam angle: 131.0°)

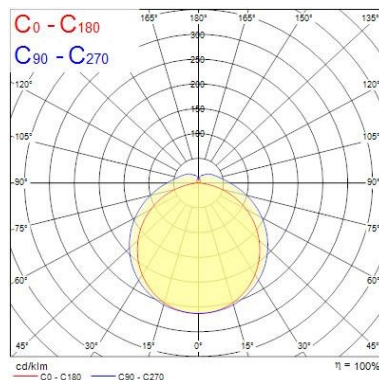


TECHNICAL DRAWINGS

Start eco Batten IP65

START eco Batten 1200 IP65 5200lm 840

0045153



SYLVANIA 0045153

This luminaire contains built-in LED lamps

The lamps cannot be changed in the luminaire.

874/2012

This luminaire contains built-in LED lamps

The lamps cannot be changed in the luminaire.

SYLVANIA 0045153

874/2012



Start eco Batten IP65

START eco Batten 1200 IP65 5200lm 840

0045153
